

HSF



RoHS

SPECIFICATION

Current Rating:	1.0Amp
Insulation Resistance:	1000MΩ min
Contact Resistance:	20MΩ max
Withstand Voltage:	500V AC/DC
Operating Temperature:	-40° C to +105° C
Contact Material:	Phosphor Bronze
Contact Plating:	Au Over Ni
Insulator Material:	PBT+30%GF UL 94V-0

Ordering Code:

FCCS01 - X - X - X - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦

① Series No:

② No. of Contacts

06P 08P 10P
12P 14P 16P
18P 20P 22P
24P 26P 30P
34P 36P 40P
44P 50P 60P
64P

③ Contact Plating

G0: Gold flash S0: Gold flash/Ni
G1: 3u" Gold S1: 3u" Gold/Ni
G2: 5u" Gold S2: 5u" Gold/Ni
G3: 10u" Gold S3: 10u" Gold/Ni
G4: 15u" Gold S4: 15u" Gold/Ni
G5: 30u" Gold S5: 30u" Gold/Ni
SW: Tin

④ Color Insulator

B:Black
G:Grey

⑤ Packing


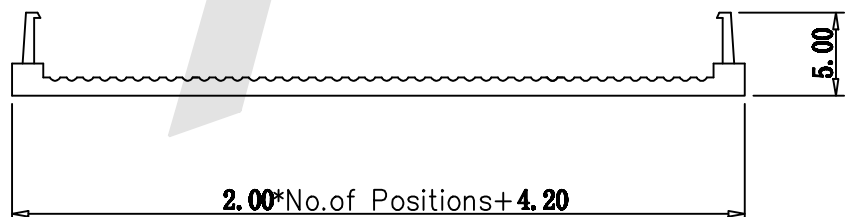
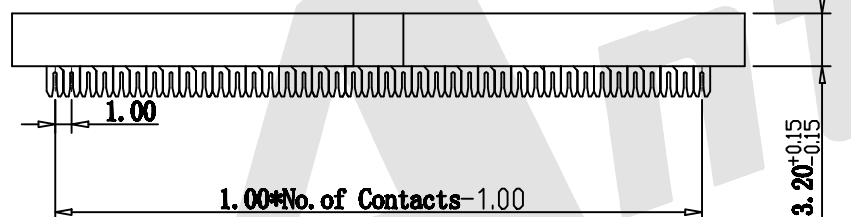
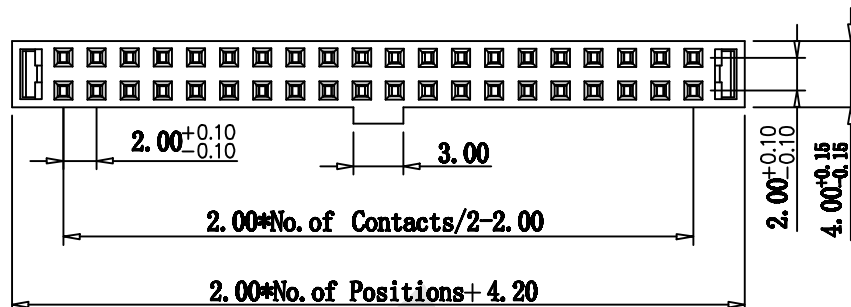


A:Tray
B:Bag
C:Tube
D:Tape Reel

⑥ With Strain relief or not

A: With strain relief
B: without strain relief

⑦ Bump Option:

A: TYPE 1, W/O BUMP
B: TYPE 2, WITH BUMP

TYPE 2
WITH BUMPTYPE 1
W/O BUMP

Unless Otherwise specified tolerance

L: ± 0.35 L.II: ± 0.20
L.I: ± 0.25 L.III: ± 0.15

SCALE: As Shown UNIT: mm

DRAW: Cong Feng DATE: 08/03/2017

CHECK: BobYang DATE: 08/03/2017



Antenk ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:

2.00mm S-Type IDC Sock

DRAWING NO: FCCS01-XXXXXX

PRODUCT NO: FCCS01-XXXXXX

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		