
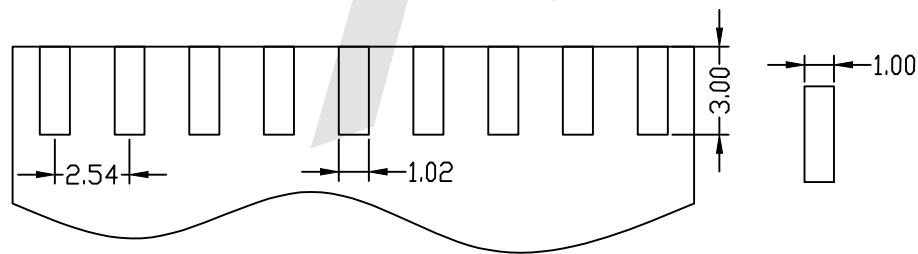
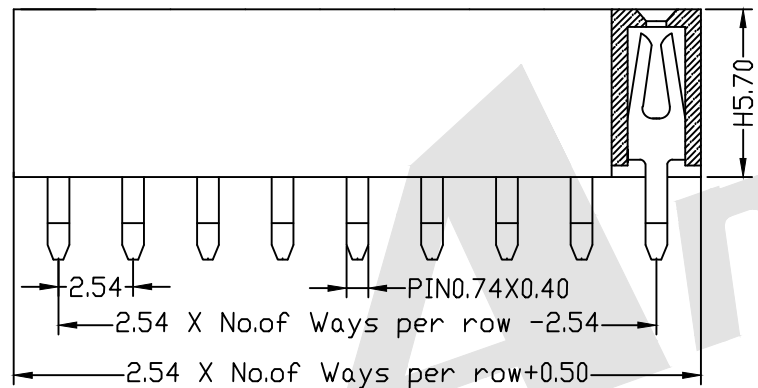


HSF

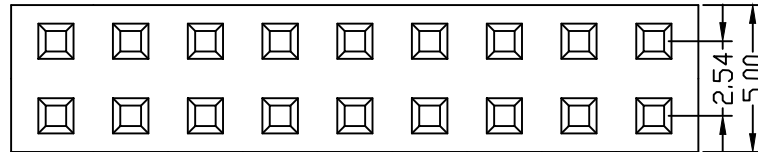

PCB LAYOUT

SPECIFICATION

Current Rating: 3.0 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65 °C to +125 °C
 Contact Material: Brass
 Insulator Material: PBT, UL 94V-0 Black


Ordering Code:

FHEU06 - X - X - D - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
 ② No. of Contacts: 02 To 80
 ③ Contact Plating:
 G0: Gold flash S0: Selective
 G1: 3u" Gold S1: Selective 3u"
 G2: 5u" Gold S2: Selective 5u"
 G3: 10u" Gold S3: Selective 10u"
 G4: 15u" Gold S4: Selective 15u"
 G5: 30u" Gold S5: Selective 30u"
 SN: Tin
 ④ Connector Type: D: Dual
 ⑤ Plastic High: H: 5.7
 Please mark the desired length in the H
- ⑥ Insulator Material:
 A: PBT
 B: PA6T
 C: LCP
 D: PA46
 E: PA9T
 ⑦ Packing:
 A: Tray
 B: Bag
 T: Tube
 U: Tube+CAP
 R: Tape&Reel
 W: Tape&Reel+CAP

Unless Otherwise specified tolerance

X. ±0.35 X. XX: ±0.20
 X. X: ±0.25 X. XXX: ±0.15

SCALE:
As ShownUNIT:
mmDRAW
YG ZHONGDATE
01/05/2016CHECK
BobYangDATE
01/05/2016

3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail: sales@antenk.com

TITLE:

2.54mm Female Header Dual Row Splint Type

DRAWING NO:

FHEU06-XXDXXX

PRODUCT NO:

FHEU06-XXDXXX

REV

DESCRIPTION

DATE