

1

2

3

4

5




6

7

8



RoHS

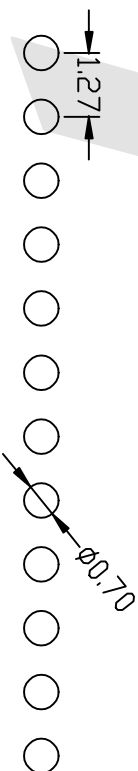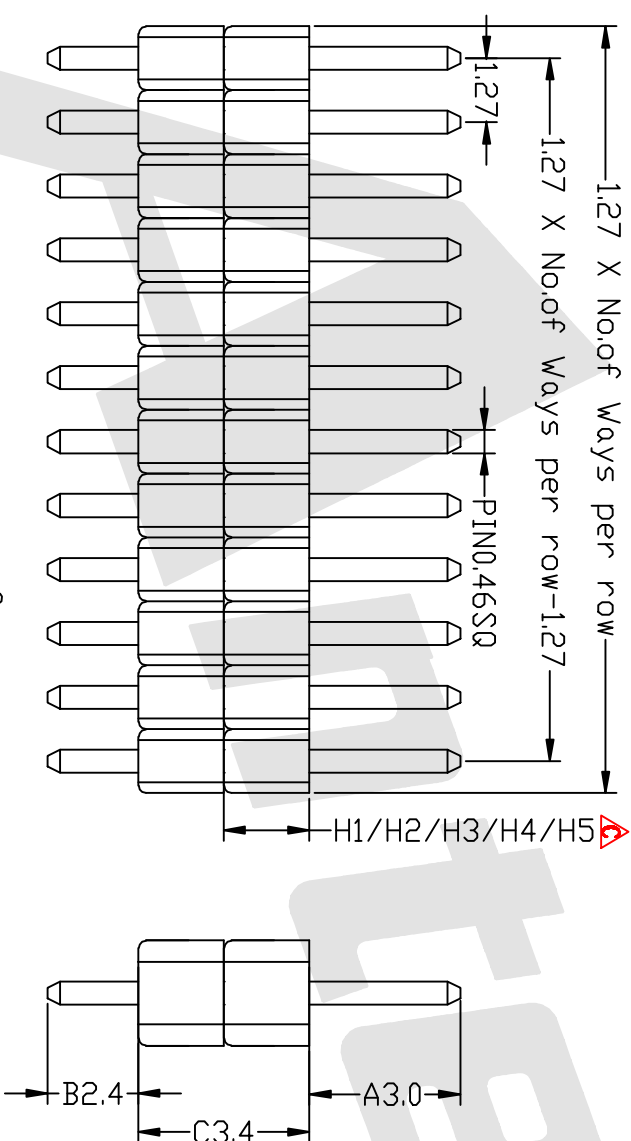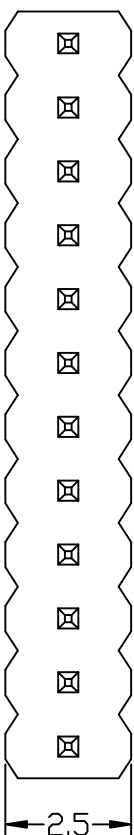

P.C.B LAYOUT

SPECIFICATIONS:

Current Rating:	Lamp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65° C to +125° C
Contact Material:	Brass
Insulator Material:	PA6T, UL94V-0, Black

Ordering Code:

PHCS05 - X - X - X - S - A-C-B - X - X - X

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No:

② No. of Contacts:

01 To 50

③ Contact Plating:

G0:Gold Flash S0:Selective
G1:30" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin

④ Connector Type:

S:Single

⑥ Insulator Material:

A: 0300-3.00mm
C: 0340-3.40mm
B: 0020-2.40mm

Please mark the desired length in the ACIS

⑦ Packing:

A:Trey
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

⑧ Plastic High:

H1:1.0mm H1:1.5mm
H2:1.7mm H2:2.0mm
H3:2.5mm

Standard IE P/N :

PHCS05-10-G0-S-0300-0340-0240-B-B-H

A	C	B	Unless Otherwise specified tolerance
3.0	3.4	2.4	I: ±0.35 I.I: ±0.20 L.I: ±0.25 L.III: ±0.15

Optional	SCALE: As Shown	UNIT: mm
----------	--------------------	-------------

Antenk ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: 1.27mm Pin Header Double Plastic
Straight Type Single Row

DRAWING NO: PHCS05-XIS-0300-0340-0240-XXX

PRODUCT NO: PHCS05-XIS-0300-0340-0240-XXX

ADD two plastic high

ADD two plastic high

Increase packing method and material

DESCRIPTION

REV

1

2

3

4

5

6

7

8