





HSF



ROHS

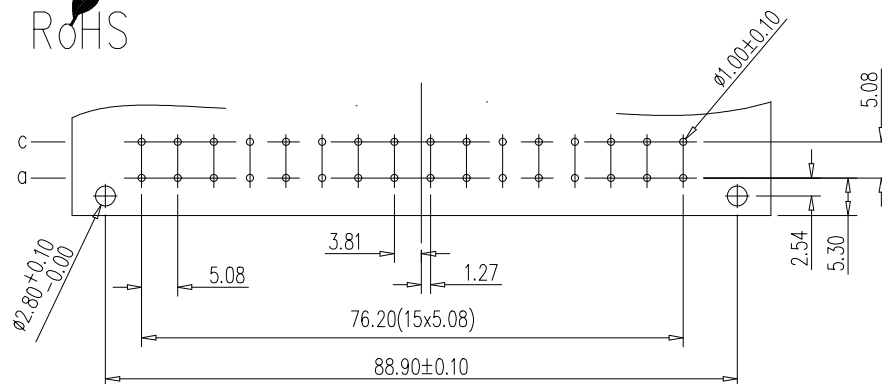

PCB Layout Diagram
ALL PCB DIMENSIONS TOLERANCE: ±0.05

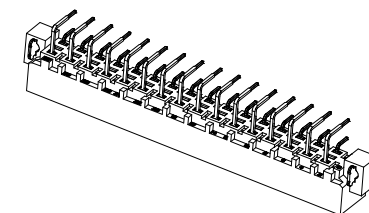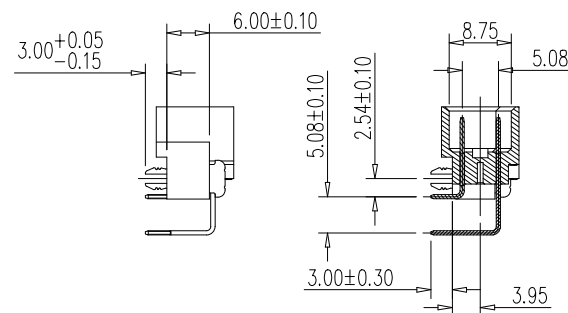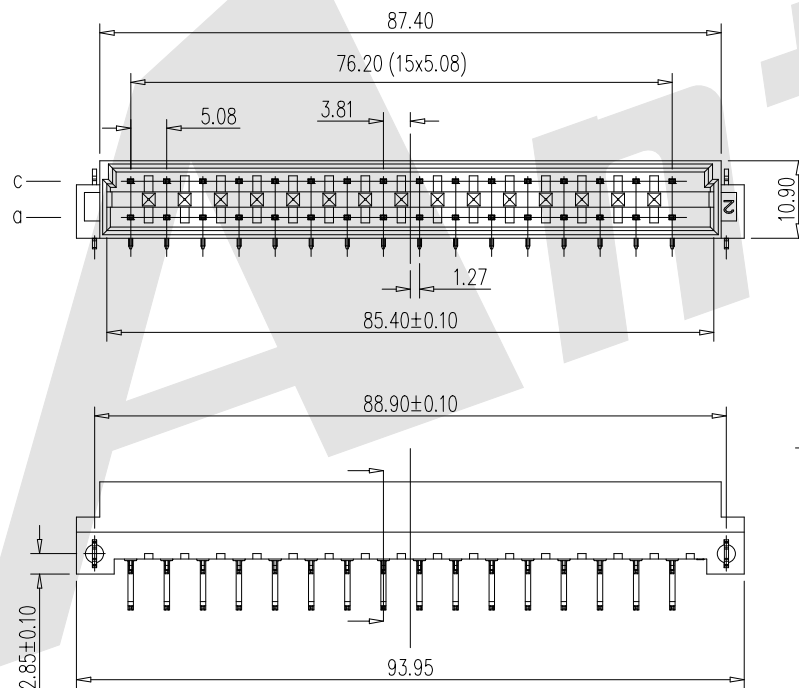

SPECIFICATIONS 规格

Rated Current 额定电流: 6.0AMP

Contact Resistance 接触电阻: 20mΩ Max

Withstand Voltage 耐压: 1000V AC 交流/DC 直流

Insulation Resistance 绝缘电阻: 1000MΩ Min 最小

Operation Temperature 工作温度: -55°C to + 125°C

Contact Material 端子材料: Copper Alloy 铜合金

Contact Plating 端子电镀: Au Over Ni 镀底镀金

Insulator Material 胶芯材质: PBT(UL94V-0)

Max.Processing Temp 最大焊接温度: 180°C for 30- 60 seconds 秒
(200°C for 10 seconds 秒)

Ordering Code:

DMR - 32 - E - I - X - D08 - X
① ② ③ ④ ⑤ ⑥ ⑦

① Series No:

② No. of Contacts
32P

③ Termination

E: Straight solder tail length H=3.00mm

④ Rows Loaded With Contacts

I: Row a+c

⑤ Contact Plating

G0: Gold flash

S0: Gold flash/Ni

G1: 3u" Gold

S1: 3u" Gold/Ni

G2: 5u" Gold

S2: 5u" Gold/Ni

G3: 10u" Gold

S3: 10u" Gold/Ni

G4: 15u" Gold

S4: 15u" Gold/Ni

G5: 30u" Gold

S5: 30u" Gold/Ni

SN: Tin

⑥ Series number
D08

⑦ Board Lock
(Blank): With Out Fork
L: With Fork

Unless Otherwise specified tolerance
X.±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:

As Shown

UNIT:

mm

DRAW

ZLA

DATE

11/21/2022

CHECK

BobYang

DATE

11/21/2022

VER./版本号

3rd

ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD

Http://www.antenk.com

E-mail: sales@antenk.com

TITLE:

DIN41612 Right Angle Male H32 Type High Power
Connectors 32 Positions

DRAWING NO: DMR-32-E-I-X-D08-X

PRODUCT NO: DMR-32-E-I-X-D08-X

According the product update size

07/12/2024

DATE/日期(M/D/Y)

DESCRIPTION/修订内容



MK/标记